


ABIT COMPUTER CORPORATION

AH6

Device Type	Mainboard
Processor	Pentium II/Celeron
Processor Speed	233/266/300/333MHz
Chip Set	Intel 440LX
Maximum Onboard Memory	384MB (EDO & SDRAM supported)
Cache	0/128/256/512KB (located on the CPU)
BIOS	Award
Dimensions	305mm x 170mm
I/O Options	32-bit PCI slots (5), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot,

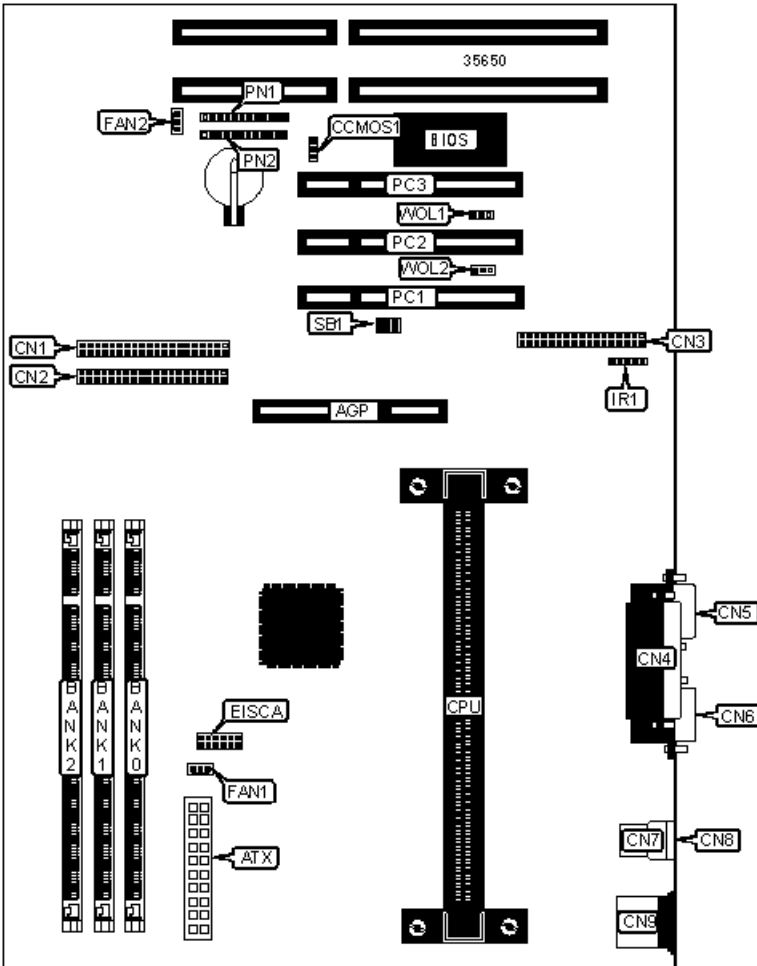

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Chassis fan power	FAN2
ATX power connector	ATX	IR connector	IR1

IDE interface 1	CN1	Reset switch	JP1/pins 1 & 2
IDE interface 2	CN2	Speaker	JP1/pins 4 - 7
Floppy drive interface	CN3	Green PC LED	JP1/pins 9 & 10
Parallel port	CN4	Power LED & keylock	JP2/pins 1 - 5
Serial port 2	CN5	IDE interface LED	JP2/pins 6 & 7
Serial port 1	CN6	Soft off power supply	JP2/pins 8 & 9
USB connector 1	CN7	32-bit PCI slots	PC1 - PC5
USB connector 2	CN8	SB link header	SB1
PS/2 mouse port	CN9	Wake on LAN connectors	WOL1
CPU fan power	FAN1	Wake on LAN connectors	WOL2

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	CCMOS1	Pins 1 & 2 closed
	CMOS memory clear	CCMOS1	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None

32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64

DIMM CONFIGURATION (CONT')

Size	Bank 0	Bank 1	Bank 2
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
72MB	(1) 8M x 64	(1) 1M x 64	None
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
136MB	(1) 16M x 64	(1) 1M x 64	None
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None

160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 32M x 64	None	None
264MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	None
288MB	(1) 32M x 64	(1) 4M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64