


JUMPER SETTINGS FOR CB641X-BX

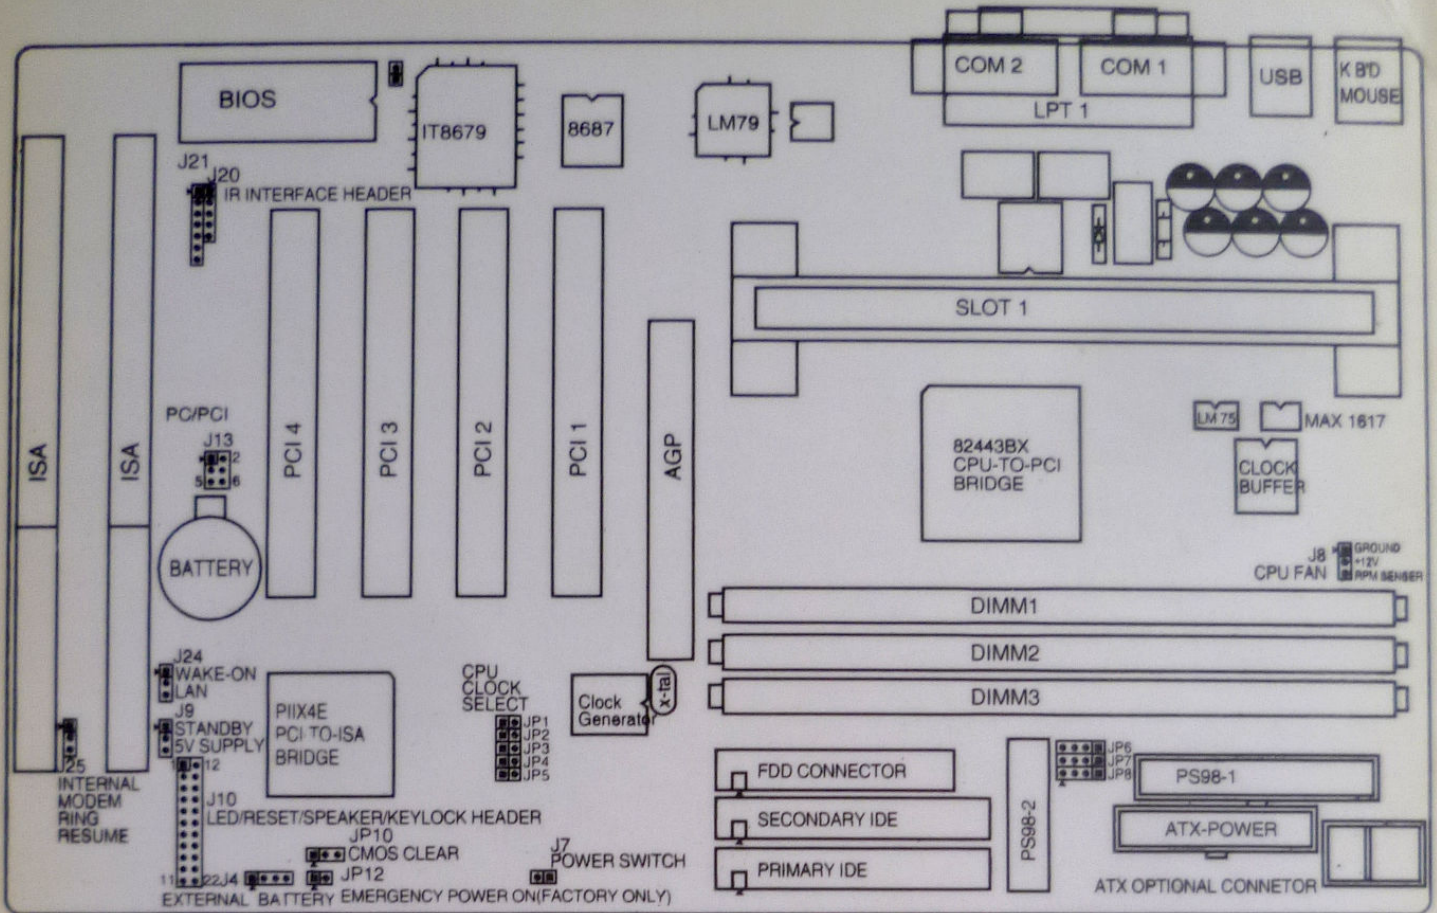

1. CPU CLOCK SETTINGS

| BUS CLOCK SPEED | JP5 | CPU CLOCK SPEED | CLOCK MULTIPLIER | JP1 | JP2 | JP3 | JP4 |
|-----------------|-----|-----------------|------------------|-----|-----|-----|-----|
| 66Mhz | ON | 233Mhz | 3.5X | ON | OFF | OFF | ON |
| 66Mhz | ON | 266Mhz | 4.0X | ON | ON | ON | OFF |
| 66Mhz | ON | 300Mhz | 4.5X | ON | OFF | ON | OFF |
| 66Mhz | ON | 333Mhz | 5.0X | ON | ON | OFF | OFF |

| BUS CLOCK SPEED | JP5 | CPU CLOCK SPEED | CLOCK MULTIPLIER | JP1 | JP2 | JP3 | JP4 |
|-----------------|-----|-----------------|------------------|-----|-----|-----|-----|
| 100Mhz | OFF | 350Mhz | 3.5X | ON | OFF | OFF | ON |
| 100Mhz | OFF | 400Mhz | 4.0X | ON | ON | ON | OFF |
| 100Mhz | OFF | 450Mhz | 4.5X | ON | OFF | ON | OFF |
| 100Mhz | OFF | 500Mhz | 5.0X | ON | ON | OFF | OFF |

2. CMOS CLEAR

| | |
|------|------------|
| JP10 | STATUS |
| 1-2 | NORMAL |
| 2-3 | CMOS CLEAR |